

UL Type AWM

90°C 1000 Volts UL Listed

Product Construction:


Conductor:

- 14 AWG, fully annealed stranded bare copper per ASTM B-8

Insulation:

- Premium-grade, color-coded PVC
- Temperature Range: -20°C to +90°C
- Color Code: See chart below

Jacket Marking:

- CAROL (SIZE) 90C 1000 VOLT  AWM

Applications:

- Motor and transformer lead
- External wiring of machinery

Features:


- Outstanding oil, flame and moisture resistance
- Extra-flexible

Industry Approvals:

- UL Type AWM

Packaging:

- 500' (152.4 m) spools
- Other put-ups available on special order

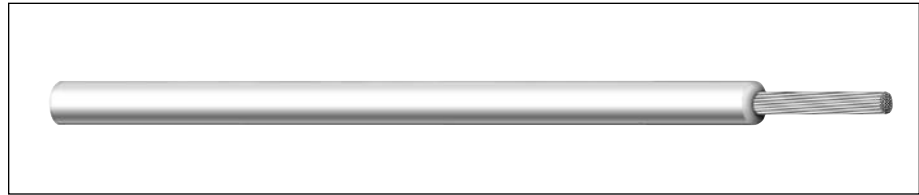

AWM - 1000 VOLT - UL

CATALOG NUMBER	AWG. SIZE	COND. STRAND	NOMINAL INS. THICKNESS		NOMINAL O.D.		STOCK COLORS	APPROX. NET WT. LBS/M ⁽⁶⁾
			INCHES	mm	INCHES	mm		
76422*	14	19/.0147	0.030	0.76	0.138	3.51	1-8	20

⁽⁶⁾ Actual shipping weight may vary.

* Non-stock item; minimum quantity purchase required.

COLOR CODE CHART

STOCK COLORS	ORDERING SUFFIX	STOCK COLORS	ORDERING SUFFIX
Black	01	Green	06
White	02	Yellow	05
Red	03	Orange	04
Blue	07	Brown	08