

3.0mm Simplex/Duplex Riser and Plenum Cable

Type OFNR, CSA FT-4 and Type OFNP, CSA FT-6

Product Construction:

Fiber:

- 1 or 2 fibers
- 900µm tight buffer

Overall Strength Member:

- Aramid fiber yarn

Jacket:

- 3.0mm unit diameters
- Flame-retardant polyvinyl chloride (PVC)
- Sequential footage markings*
- Orange jacket—multimode fibers (except 10 Gbps)
- Aqua jacket—10 Gbps multimode fibers
- Yellow jacket—singlemode fibers

Features:

- Industry-standard design
- Ideal for interconnect and Fiber-To-The-Desk (FTTD)

Performance:

- Temperature:
Storage -40°C (-40°F) to +70°C (+158°F)
Operating -20°C (-4°F) to +70°C (+158°F)
- Minimum Bend Radius:
20 X OD—Installation
10 X OD—In-Service
- Maximum Crush Resistance:
500 lbs/in (875 N/cm)


Applications:

- Interconnect design compatible with connectors requiring 3.0mm jacket diameter
- Fiber-To-The-Desk (FTTD)
- UL Listed Type OFNR for installation in vertical riser and general horizontal applications when installed in accordance with NEC article 770-51 (b) and 770-53 (b)
- UL Listed Type OFNP for installation in ducts, plenums and other spaces used as environmental air returns when installed in accordance with NEC article 770-51 (a) and 770-53 (a)

Compliances:

- UL and c(UL) Listed Type OFNR/OFNP
- CSA FT-4, CSA FT-6
- GR-409
- RoHS Compliant Directive 2002/95/EC

*Sequential meter markings available upon request

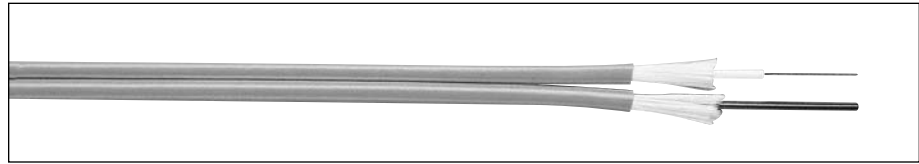


CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
Riser										
XX0011SNR3.0	1	—	0.118	3.0	5.5	8.2	110	490	65	290
XX0021ZNR3.0	2	—	0.114 x 0.247	2.9 x 6.0	10.5	15.6	220	980	160	580
Plenum										
XX0011SNU3.0	1	—	0.118	3.0	6.5	9.7	110	490	65	290
XX0021ZNU3.0	2	—	0.114 x 0.247	2.9 x 6.0	12.1	18.0	220	980	160	580


XX denotes glass type.

A complete listing of NextGen® Brand glass types is specified on page 3 of this catalog.

Typical Cross-Section

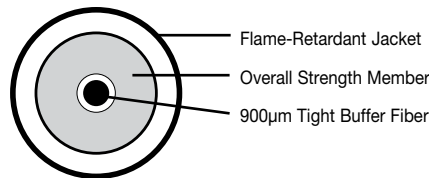

Simplex

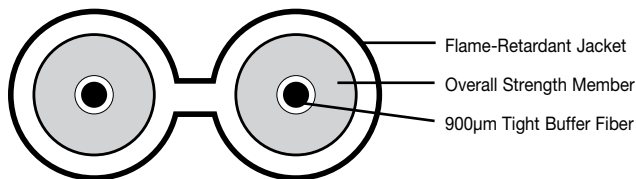

Duplex Zipcord

Hybrid designs (containing singlemode and multimode fiber) and composite designs (containing copper conductors) are also available.

Ordering Part Number Example

CG0011SNU3.0 or CG0021ZNU3.0

62.5 mm multimode, one or two fibers

Please see pages 4 and 5 for a complete guide on part number selection and ordering information.