


# Types SJTOW and STOW

90°C 300 and 600 Volt UL/CSA Portable Cord

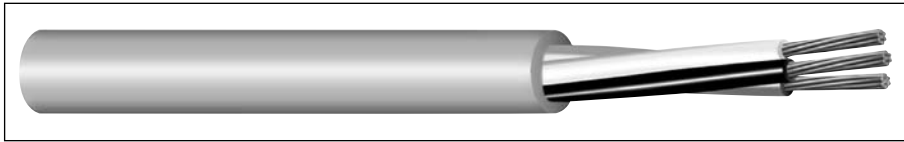

### TYPE SJTOW – 300 VOLT – UL/CSA

CATALOG NUMBER	NO. OF COND.	AWG. SIZE	COND. STRAND	NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS†	APPROX. NET WEIGHT LBS/M <sup>(S)</sup>
				INCHES	mm	INCHES	mm		
86902*	2	18	16/30	0.030	0.76	0.290	7.37	10	42
86903*	3	18	16/30	0.030	0.76	0.305	7.75	10	54
86904*	4	18	16/30	0.030	0.76	0.335	8.51	7	65
86912*	2	16	26/30	0.030	0.76	0.315	8.00	13	57
86913	3	16	26/30	0.030	0.76	0.330	8.38	13	70
86914*	4	16	26/30	0.030	0.76	0.365	9.27	10	86
86922*	2	14	41/30	0.030	0.76	0.345	8.76	18	67
86923	3	14	41/30	0.030	0.76	0.365	9.27	18	92
86924	4	14	41/30	0.030	0.76	0.415	10.54	15	114
86932*	2	12	65/30	0.030	0.76	0.410	10.44	25	95
86933	3	12	65/30	0.030	0.76	0.430	10.92	25	132
86934*	4	12	65/30	0.030	0.76	0.475	12.07	20	167
86942*	2	10	104/30	0.045	1.14	0.550	13.97	30	160
86943*	3	10	104/30	0.045	1.14	0.580	14.73	30	230
86944*	4	10	104/30	0.045	1.14	0.635	16.12	25	285

### TYPE STOW – 600 VOLT – UL/CSA

CATALOG NUMBER	NO. OF COND.	AWG. SIZE	COND. STRAND	NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS†	APPROX. NET WEIGHT LBS/M <sup>(S)</sup>
				INCHES	mm	INCHES	mm		
86952*	2	18	16/30	0.030	0.76	0.350	8.89	10	60
86953	3	18	16/30	0.030	0.76	0.365	9.27	10	72
86954*	4	18	16/30	0.030	0.76	0.395	10.03	7	85
86962*	2	16	26/30	0.030	0.76	0.375	9.58	13	76
86963	3	16	26/30	0.030	0.76	0.395	10.08	13	90
86964	4	16	26/30	0.030	0.76	0.425	10.80	10	107
86972*	2	14	41/30	0.045	1.14	0.505	12.83	18	120
86973	3	14	41/30	0.045	1.14	0.535	13.59	18	156
86974	4	14	41/30	0.045	1.14	0.575	14.61	15	184
86982*	2	12	65/30	0.045	1.14	0.570	14.48	25	165
86983	3	12	65/30	0.045	1.14	0.600	15.24	25	208
86984*	4	12	65/30	0.045	1.14	0.650	16.51	20	254
86992*	2	10	104/30	0.045	1.14	0.620	15.75	30	195
86993*	3	10	104/30	0.045	1.14	0.655	16.64	30	262
86994	4	10	104/30	0.045	1.14	0.705	17.91	25	323

\* Non-stock item; minimum quantity purchase required.  
 † Green conductor for grounding only. Ampacities based on NEC table 400.5(A).  
 (S) Actual shipping weight may vary.

### Product Construction:

#### Conductors:

- 18 through 6 AWG. fully annealed stranded bare copper per ASTM B-174

#### Insulation:

- Premium-grade, color-coded PVC
- Color Code: See chart below

#### Jacket:

- Polyvinylchloride (PVC), Gray or Yellow
- Temperature range: -40°C to +90°C
- Voltage rating:  
300 Volts Type SJTOW  
600 Volts Type STOW

#### Jacket Marking:

- CAROL (SIZE) (mm<sup>2</sup>) 90C UL WATER RESISTANT SJTOW (OR STOW) CSA (-40C) FT-2 RoHS MADE IN USA 300V (or 600V)

### Applications:

- Portable tools
- Motors
- Floor maintenance equipment
- Hospital equipment
- Sound equipment
- Washing machines
- Portable lights
- Lamps and similar equipment

### Features:

- Oil- and water-resistant jacket
- Resists:  
Oils  
Water  
Acids  
Alkalies  
Ozone
- UL Listed and CSA certified for indoor and outdoor use

### Industry Approvals:

- UL Flexible Cord - UL Subject 62
- MSHA Approved (where applicable)
- CSA
- RoHS Compliant

### Packaging:

- 250' (76.2 m), 500' (152.4 m), and 1000' (304.8 m)
- Other put-ups available on special order

### COLOR CODE CHART

NO. OF CONDUCTORS	COLOR
2	Black, White
3	Black, White, Green
4	Black, White, Red, Green

