

GenSPEED® 10 MTP™ Red List Free LP Rated Category 6A Cable



Features

- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Made in U.S.A.

Electrical Characteristics

- Outer jacket ensures electrical performance during long term water submersion
- Dry core construction for cleaner termination
- UL Listed CMP-LP 0.8A with certified performance for high-power PoE applications

Applications

- Intended for installation in below-grade conduit, duct, and other wet environments
- Suitable for indoor plenum spaces and outdoor applications
- Cable jacket must remain unabraded to avoid water ingress. Water must not be allowed to ingress into the cable ends
- IEEE 802.3: 10G BASE-T, 1000 BASE-T
- 100 BASE-TX, 10 BASE-T, PoE, PoE+, PoE++
- ANSI/TIA 854: 1000 BASE-TX
- Digital Video
- Broadband and Baseband Analog Video
- CDDI, Token Ring, ATM

Standard Compliances

- Red List Free
- NEC/CEC Type CMP (NFPA 262) for plenum
- UL Listed SUN RES (720 hour) Rated to be installed permanently outdoor in direct sunlight
- ANSI/TIA 568.2-D
- RoHS Compliant Directive 2011/65/EU
- UL 444
- ANSI/TIA 862 (Building Automation)
- ICEA S-116-732
- ISO/IEC 11801 Ed. 2.0 (Class EA)
- Wet Location rated per UL 83
- UL Listed CMP-LP 0.8A - equivalent to 160 watts using 50 volts over four pairs
- Complies with NEC 2017 and NEC 2020 revisions

CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Fluoropolymer

Color Code

- Pair 1: Blue-White
- Pair 2: Orange-White
- Pair 3: Green-White
- Pair 4: Brown-White

Separator

- Cross-web

Core Wrap

- Mosaic™ Variable Laser Cut Tape

Jacket


- Fluoropolymer

PHYSICAL DATA

Nominal Cable Diameter (in)	0.250
Nominal Cable Weight (lbs/1000 ft)	33
Minimum Bend Radius (in)	2.1
Maximum Pulling Force (lbs)	40
Temperature Rating (°C)	
Installation:	0 to +60
Operation:	-20 to +125

PART NUMBERS

Standard packaging: 1000' Spool

Jacket Color	CMP (Plenum)
 Purple	7141045

Note: Non-stock items may be subject to minimum order quantities.

DATA SHEET 7524d, 03/1/21

ELECTRICAL PERFORMANCE


Frequency MHz	PSACR** (min)	ACR** (min)	Insertion Loss (min)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	TCL (min)	PSANEXT (min)		PSAACRF (min)		
	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA / GC Guaranteed	TIA Guaranteed	GC Guaranteed	TIA Guaranteed	GC Guaranteed
1	70.2	72.2	2.1	72.3	74.3	64.8	67.8	20.0	40.0	67.0	69.0	67.0	69.0	
4	59.5	61.5	3.8	63.3	65.3	52.8	55.8	23.0	40.0	67.0	69.0	66.2	68.2	
10	51.4	53.4	5.9	57.3	59.3	44.8	47.8	25.0	40.0	67.0	69.0	58.2	60.2	
16	46.8	48.8	7.5	54.2	56.2	40.7	43.7	25.0	38.0	67.0	69.0	54.1	56.1	
20	44.4	46.4	8.4	52.8	54.8	38.8	41.8	25.0	37.0	67.0	69.0	52.2	54.2	
31.25	39.4	41.4	10.5	49.9	51.9	34.9	37.9	23.6	35.1	67.0	69.0	48.3	50.3	
62.5	30.4	32.4	15.0	45.4	47.4	28.9	31.9	21.5	32.0	65.6	67.6	42.3	44.3	
100	23.2	25.2	19.1	42.3	44.3	24.8	27.8	20.1	30.0	62.5	64.5	38.2	40.2	
150	16.0	18.0	23.7	39.7	41.7	21.3	24.3	18.9	28.2	59.9	61.9	34.7	36.7	
200	10.2	12.2	27.6	37.8	39.8	18.8	21.8	18.0	27.0	58.0	60.0	32.2	34.2	
250	5.2	7.2	31.1	36.3	38.3	16.8	19.8	17.3	26.0	56.5	58.5	30.2	32.2	
300	0.9	2.9	34.3	35.1	37.1	15.3	18.3	16.8	25.2	55.3	57.3	28.7	30.7	
400	—	—	40.1	33.3	35.3	12.8	15.8	15.9	24.0	53.5	55.5	26.2	28.2	
500	—	—	45.3	31.8	33.8	10.8	13.8	15.2	23.0	52.0	54.0	24.2	26.2	
600*	—	—	50.1*	30.6*	32.6*	9.2*	12.2*	14.7*	22.2*	—	50.8*	—	22.6*	
700*	—	—	54.5*	29.6*	31.6*	7.9*	10.9*	14.2*	21.5*	—	49.8*	—	21.3*	
750*	—	—	56.7*	29.2*	31.2*	7.3*	10.3*	14.0*	21.2*	—	49.4*	—	20.7*	

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.

*Values are for reference only.

**PSACR & ACR not specified in ANSI/TIA 568.2-D

**TYPICAL GenSPEED® 10 CATEGORY 6A
INDOOR/OUTDOOR CROSS-SECTION**

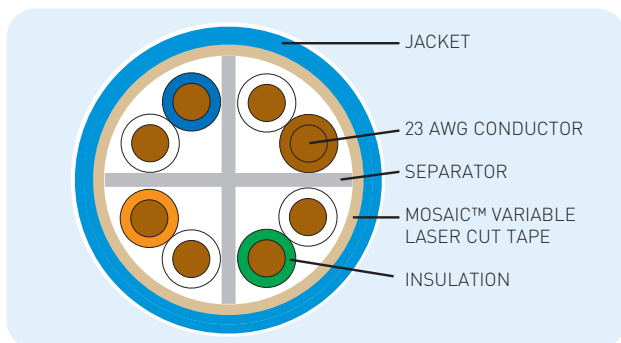

ELECTRICAL CHARACTERISTICS

	Max.	Nom.
DC Resistance Ohms/100 m (328 ft) @ 20°C	9.38	7.00
DC Resistance Unbalanced Individual Pair %	4.00	< 1
Delay Skew ns/100 m	45	
Nom. Velocity of Propagation % Speed of Light	70	
Characteristic Impedance Frequency (f): 1-500 MHz	Ohms 100 ± 15	